



### Principle

Middleby Marshall PS Series conveyor ovens bake both faster and at a lower temperature than other ovens. Vertical columns of hot air move heat aerodynamically instead of using high temperatures. The streams of hot air remove the boundary layers of cool heavy air which tend to insulate the product. All Middleby ovens are designed to cook a multitude of products including pizza, seafood, sandwiches, bagels, ethnic foods and more.

### General Information

The PS520 conveyor oven is ideally suited for Kiosk and express-style locations where smaller ovens are required.

### Standard Features

- Patented EMS Energy Management System\* reduces energy consumption and increases cooking efficiency
- 20" (508mm) long cooking chamber with 18" (457.2mm) belt
- 42" (1066.8mm) long, 35" (189mm) deep, and 21-3/4" (552.4mm) high overall dimensions
- Furnished with 4" (101.6mm) legs
- Stackable up to three high.
- Microprocessor-controlled bake time/conveyor speed
- Stainless steel front, sides, top and interior
- Reversible conveyor direction
- 12" (304.8mm) Extension Tray

### Optional Features

- 6" (152.4mm) Extension Tray
- Stand with casters
- Extended warranty available

### Conserves Energy

Unit incorporates a patented Energy Management System - EMS. Middleby ovens provide very efficient heat transfer to product. Energy is conserved as air is recycled from heater to product, with minimum loss. Oven is cool to the touch.

### Cleanability

PS520 Ovens are designed for easy cleaning. Removable parts include: crumb pans, end panels, air fingers, exit tray, and a removable conveyor belt assembly.

### Easily Services

Control compartment is designed for quick and easy access.


### Warranty

All PS520 models have a one year parts and labor warranty.


### Ventilation

Use of a ventilation hood is strongly recommended.


## PS520 Series Electric Counter Top Conveyor Oven

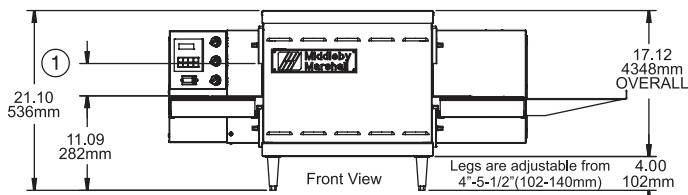

① The Opening Height is Adjustable from 2-1/4 inch minimum to 3-3/4 inch maximum in 1/2 inch increments.

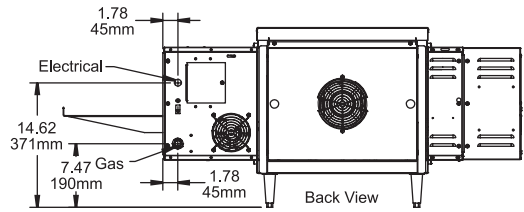


### PS520-1

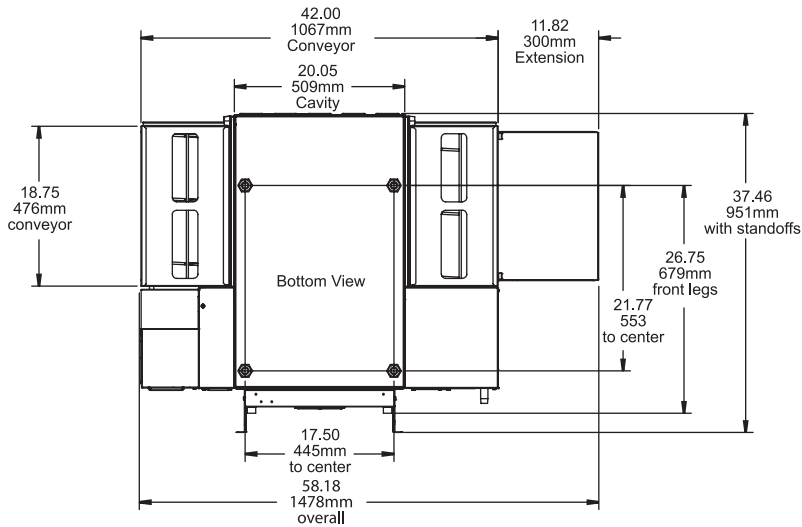


### PS520-2

① The Opening Height is Adjustable from 2-1/4 inch minimum to 3-3/4 inch maximum in 1/2 inch increments.

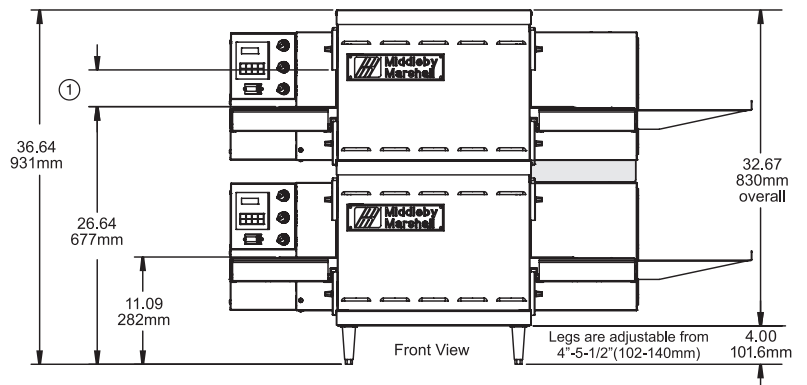

② P/N 59927 is shown in its correct installed position & must be installed in the field on all double & triple stack ovens.

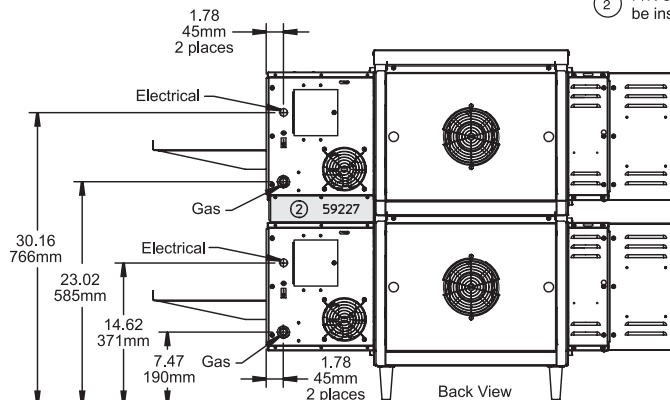




# Middleby Marshall®

## CONVEYORS OF EXCELLENCE

## PS520 Series


## Electric Counter Top Conveyor Oven

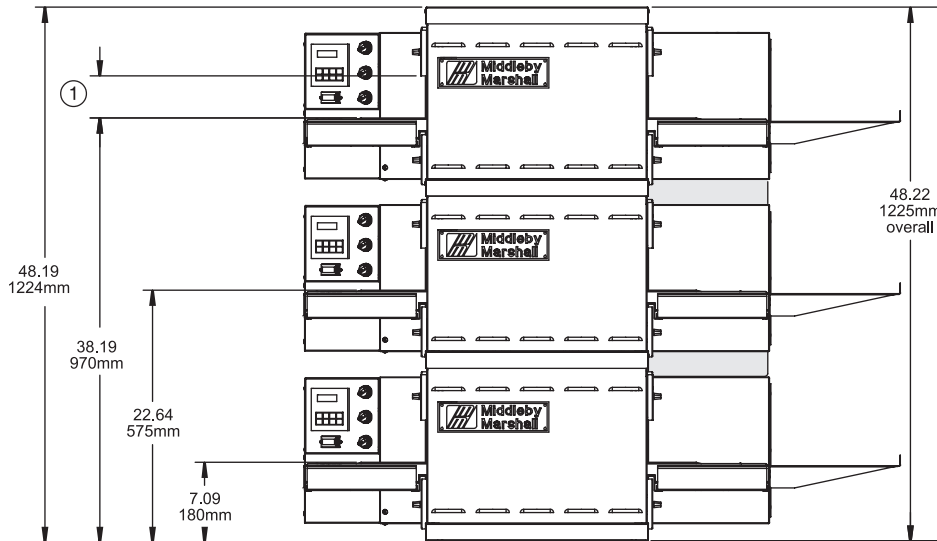

### Front View

- 1 The Opening Height is Adjustable from 2-1/4 inch minimum to 3-3/4 inch maximum in 1/2 inch increments.
- 2 P/N 59927 is shown in its correct installed position & must be installed in the field on all double & triple stack ovens.


**PS520-3**

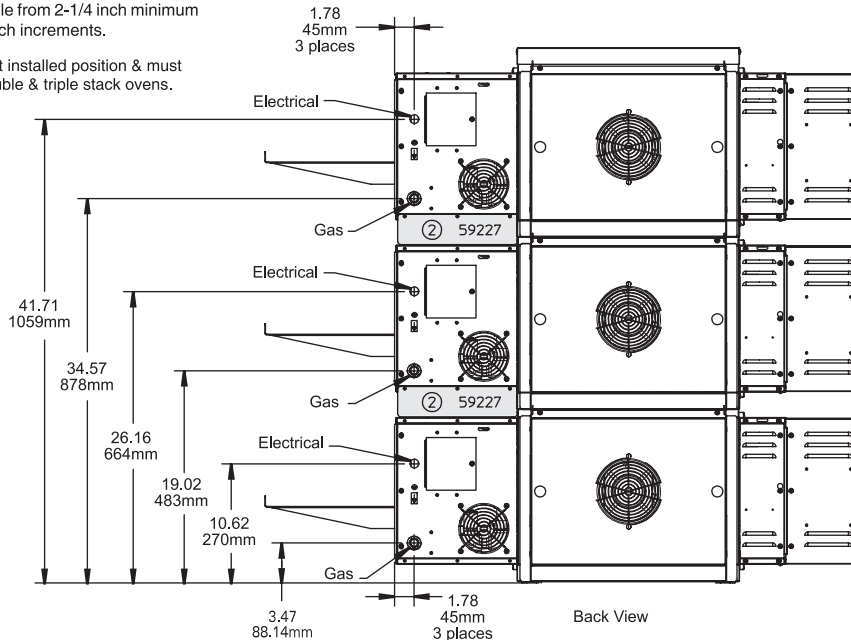



Back View

## Optional cart available for all PS520 Series Models

Stand for **Single and Double Oven Only**

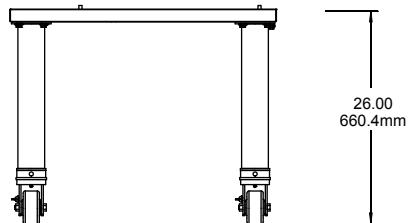

Stand for **Triple Oven Only**

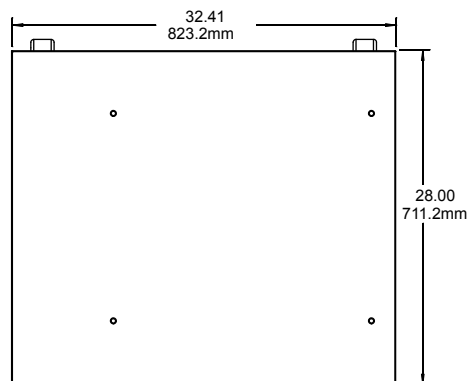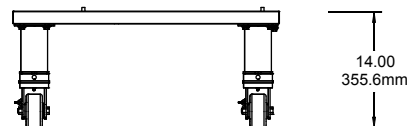

**RECOMMENDED MINIMUM CLEARANCES**

Rear of Oven to Wall	Control end of conveyor to wall	Non-control end of conveyor to wall
0"	0"	0"

**GENERAL SPECIFICATIONS**

	Heating Zone	Baking Area	Belt Length	Belt Width	Overall Length (exit trays installed)	Height	Depth	Maximun Operating Temp	Bake Time Range	Ship Wt	Ship Cube
PS520-1	20" 508mm	2.5 sq ft 0.23 sq m	42" 1066 mm	18" 457mm	58.18" 1478mm	21.10" 536mm	38.81" 966mm	550°F 288°C	1-10 min	325 lbs 147.42kg	22.1 ft3 0.62m3
PS520-2	40" 1016mm	5.0 sq ft 0.46 sq m	42" 1066 mm	18" 457mm	58.18" 1478mm	36.64" 931mm	38.81" 966mm	550°F 288°C	1-10 min	650 lbs 294.48 kg	44.2 ft3 1.24m3
PS520-3	60" 1524mm	7.5 sq ft 0.69 sq m	42" 1066 mm	18" 457mm	58.18" 1478mm	48.19" 1224mm	38.81" 966mm	550°F 288°C	1-10 min	975 lbs 442.25 kg	66.3 1.86m3

**ELECTRICAL SPECIFICATIONS**

Version	Voltage	Phase	Freq	K.W.	Supply	Breakers
<b>DOMESTIC</b>	208v	1	50/60 hz	8.3	2 pole, 3 wire	As per local codes
	230-240v	1	50/60 hz	7.6-8.3	2 pole, 3 wire	As per local codes
	480v	1	50/60 hz	8.3	2 pole, 3 wire	As per local codes
<b>CE MODEL</b>	230-240v	1	50/60 hz	7.6-8.3	2 pole, 3 wire	As per local codes
	380v	1	50/60 hz	8.3	2 pole, 3 wire	As per local codes
	380	3	50/60 hz	8.3	2 pole, 3 wire	As per local codes

\* The current draw rating shown above are maximum values for normal operation, amperage draw will be less than the listed value.

Each oven includes a 6 ft cord with NEMA# L6-50P plug. Customer to provide NEMA# L6-50R receptical.