


a

PRODUCT FEATURES

- New intelligent control circuit dedicated to saving power and water consumption.
- Inbuilt safety features freeze cycle back up timer, defrost back up, low voltage & high amp protector.
- New 7 segment operational display panel for ease of use.
- Unique closed cell water circuit for ultimate contamination. protection.
- Durable stainless-steel exterior.
- Fasily accessible and cleanable air filters reduce costly callouts
- Exceptionally hard crystal-clear cubes that melt slowly.
- Auto rinse and flush cycle.

TECHNICAL DRAWING

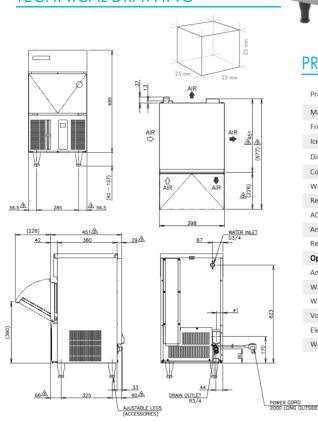

PRODUCT SPECIFICATION

	Production Capacity / 24hrs	Approx. 18kg @21°C Air temp; 15°C Water Approx. 15kg @32°C Air temp; 21°C Water
	Max Storage Capacity	Approx. 11.5kg (Bin Control Setting Approx.6kg)
	Freeze Cycle Time	Approx. 19 Min (At. 21°C Air ; 15°C Water)
	Ice Production / cycle	Approx. 0.27kg/21pcs
	Dimensions	398mm (W) x 451mm (D) x 787mm (H) (Includes 92mm-127mm Legs)
	Cooling	Air
	Weight Net/Gross (kg)	34/39
	Refrigeration System	Forced Air Circulation
	AC Supply Voltage	1 PHASE 220-240V 50Hz / 10amp Plug
	Amperage	Running: 1.7A Rated: 1.7A Starting: 10A
	Refrigerant Charge	R134a / 130g
	Operating Conditions:	
	Ambient Temp	1-40°C
	Water Supply Temp	5-35°C
	Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
	Voltage Range	±6%
	Electrical consumption	Rated Motor: 270W (Power Factor: 66%)
	Water Consumption / 24hrs	Approx. 0.7m³/d(AT. 21°C; WT 15°C)













For free 6 month extended warranty, register online within 4 weeks of purchase date. hoshizaki.com.au